



Precast Septic Tank

3742 West Front Street - Traverse City, MI 49684-8152 - 231-946-7880 - www.theconcreteservice.com

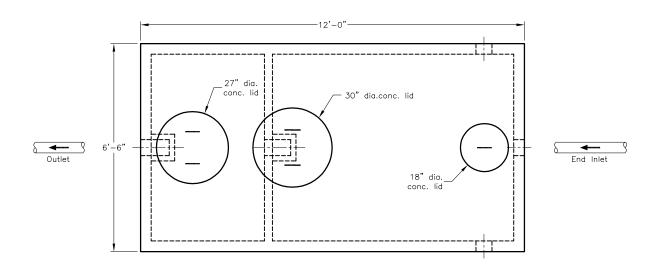

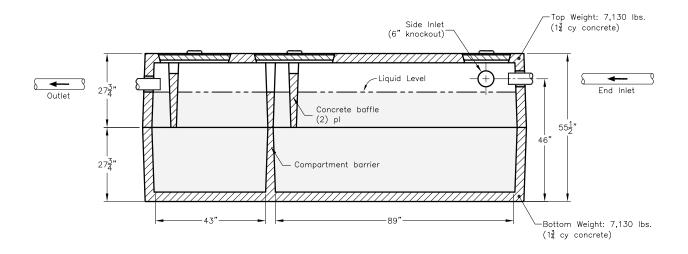

Notes:

- 1. Typical wall thickness is 3.5"
- 2. Unless otherwise noted, end inlet & outlet are fitted with polylock accepting pipes up to 6" dia.
- 3. Concrete access lid(s) shown are included
- 4. Plastic tees shown are included
- 5. Dimensions shown are approximate only
- 6. Tank may have internal support ribs or similar structures not shown above

#1600d-46-c

Outside Dim. 78W x 144L x 55½H Total Weight 14,260 lbs Capacity 1,600 ga.